



GV300 Series

Compact GNSS trackers with multiple interfaces suitable for a wide range of vehicles

72g

80mm(L) × 48mm(W) × 25mm(H)

-30°C ~ +70°C

Operating Voltage: 8V to 32V DC
Li-Polymer, 250 mAh

- Multiple I/O Interfaces
- RS232 Serial Port
- Two-way Audio Interfaces
- OTA Control
- Scheduled Timing Report
- Geo-fences
- Low Power Alarm
- Power On Report
- Antenna Disconnect Alarm
- Garmin FMI Support
- Crash Detection (GV300)
- Driving Behavior Monitoring
- Tow Alarm
- Fuel Level Monitoring
- Support Temperature Sensor
- Driver ID Identify


The GV300 series includes two models designed for light duty vehicle applications. The series features multiple interfaces including one RS232 serial port, one smart input, a two-way audio interface, etc. to support a wide variety of external accessories.



GV300 Series Models

	Region	Operating Band	GNSS Type	Position Accuracy (CEP)	Certificate
GV300	Worldwide	GSM 850/900/1800/1900 MHz	u-blox All-in-One GNSS receiver	Autonomous: < 2.5m SBAS: < 2.0m	CE/FCC/E-Mark/ ANATEL
GV300W	Worldwide	UMTS 850/1900/2100 MHz GSM 850/900/1800/1900 MHz	u-blox All-in-One GNSS receiver	Autonomous: < 2.5m SBAS: < 2.0m	CE/FCC/E-Mark

Multiple Interfaces

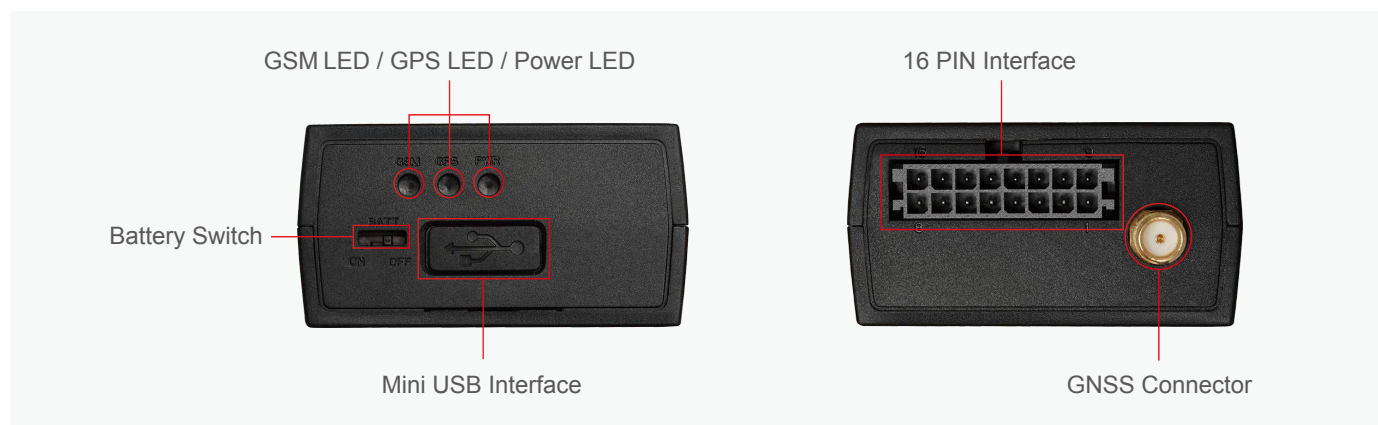

Digital Inputs	1 positive trigger input for ignition detection 2 negative trigger inputs for normal use
Digital Outputs	2 digital outputs, open drain, 150 mA max drive current
Latched Digital Output	1 digital output with internal latch circuit, open drain, 150 mA max drive current
Configurable Input	1 special input can be configured as negative trigger digital input or analog input (0V-16V)
Analog Input	1 analog input (0.3V-16V)
Serial Port	1 RS232 serial port on 16 pin molex type connector, for external devices (GARMIN protocol support)
Two-way Audio Interfaces	2 differential outputs 1 single end input
Cellular Antennas	Internal only
GNSS Antenna	Internal antenna and optional external antenna
LED Indicators	CEL, GNSS, power
Mini USB Interface	Used for upgrading and debugging